

# Intrepid 6A


## Full-featured RF system for 6 foot door openings

Combining superb detection rate with the Active Response System that automatically adjusts the system to block interference, Intrepid 6A is a reliable workhorse in the fight against shrink.

The modern, acrylic design blends into any store environment. The optional people counter can provide useful store analytics, while the remote tuning capabilities help with reducing the total cost of ownership.

### KEY FEATURES

- ▲ Elegant acrylic design
- ▲ Active Response System monitors store environment and automatically adjusts the system to reduce interference
- ▲ Can be synchronized with multiple systems
- ▲ Network connection and I/O port for easy integration with other LP systems
- ▲ Remote tuning capability reduces maintenance costs and downtime
- ▲ Optional people counter can help store operations and scheduling

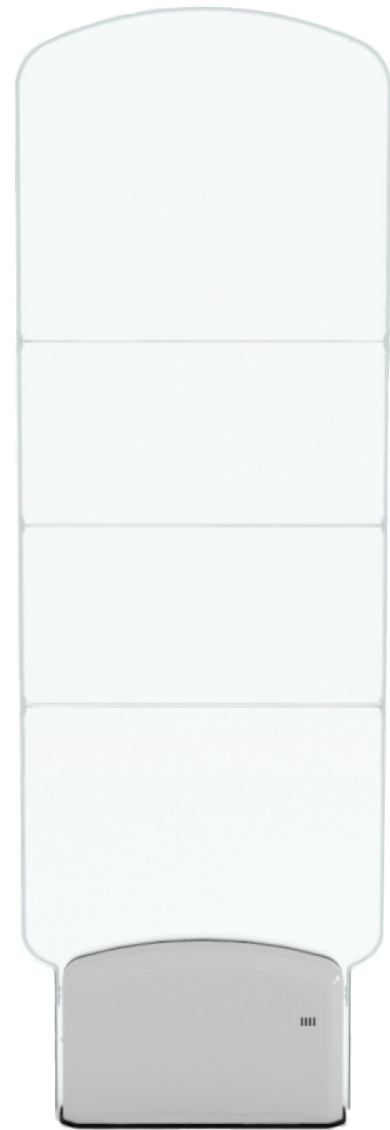

# Intrepid 6A

## Full-featured RF system for 6 foot door openings

SPECIFICATIONS	
Height	59.45"
Width	19.68"
Depth	4.13" at the bottom, 0.79" at the top
Weight	42 lbs.
Detection range	Up to 6 feet per pedestal (3 feet per side)
Power requirement	17 VAC / 1A (an external power supply required)
Alarm mode	Buzzer and RGB alarm indicator
Operating frequency	8.2 MHz $\pm$ 200 Hz
Operating temperature	32° F - 95° F
Relative humidity range	0 - 90%, non-condensing
Materials composition	Plastic, acrylic, steel

### ORDER CODES

SY-BSI82RFM CDUS

(Antenna without an integrated people counter)

SY-BSI82RFM-PC CDUS

(Antenna with an integrated people counter)



**PROSEGUR**  
**SECURITY**

(800) 405-1832 // PROSEGUR.US