
Centurion L

Inconspicuous AM system hidden in the door frame

With most of its components hidden from the view, Centurion L offers strong protection without impacting store aesthetics.


Advanced features include strong detection rate, jammer detection, sensitivity adjustment and network connectivity.

The optional people counter can provide useful store analytics, while the remote tuning option can reduce the need for maintenance visits and help lower the total cost of ownership.

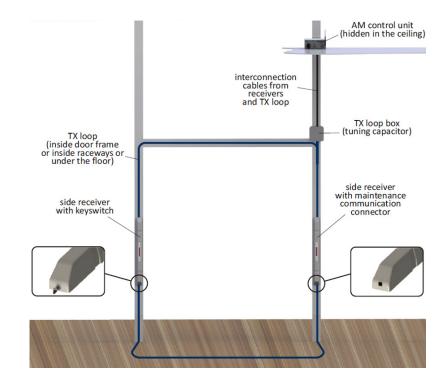



Centurion L Inconspicuous AM system hidden in the door frame

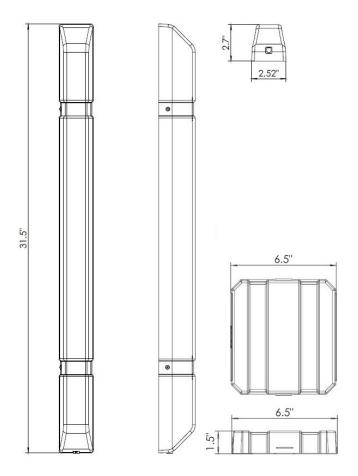

ORDER CODE SY-BSI58 LOOP CDUS

SPECIFICATIONS	
Body Height	31.5"
Body Width	2.52"
Body Depth	2.7"
Control box width	6.5"
Control box depth	1.5"
Detection range	6 feet maximum
Power requirement	0.5 A 100-120 VAC @ 60 Hz
Fuse rating	1 A @ 250 V
Power consumption	120 W
Operating frequency	58 KHz ±200 Hz
Transmit burst	1.6 mS
Burst repetition rate	90 Hz or 45 Hz (normal) on 60Hz AC line @ 58 KHz
Receiver center frequency	58 KHz
Alarm mode	Piezo / LED on RX antenna
Operating temperature	32° F - 122° F
Relative humidity range	0 - 90%, non-condensing
Materials composition	Plastic, acrylic, steel



(800) 405-1832 // PROSEGUR.US