

Centurion 6A


State-of-the-art AM system for 6 foot door openings

Combining elegant design with advanced electronics, Centurion 6A offers strong detection rate to help fight shrink while fitting in unobtrusively in any store environment.

The system automatically detects interference and the use of EAS jammers. The optional people counter can provide useful store analytics, while the remote tuning capabilities help with reducing the total cost of ownership.


KEY FEATURES

- ▲ Modern and elegant acrylic design
- ▲ Exceptional detection rate
- ▲ Sensitivity adjustment reduces false alarms
- ▲ Built-in jammer detection
- ▲ Network connection and I/O port for easy integration with other LP systems
- ▲ Optional remote tuning capability can reduce maintenance costs and downtime
- ▲ Optional people counter can help with store operations and scheduling
- ▲ Optional booster-bag detection

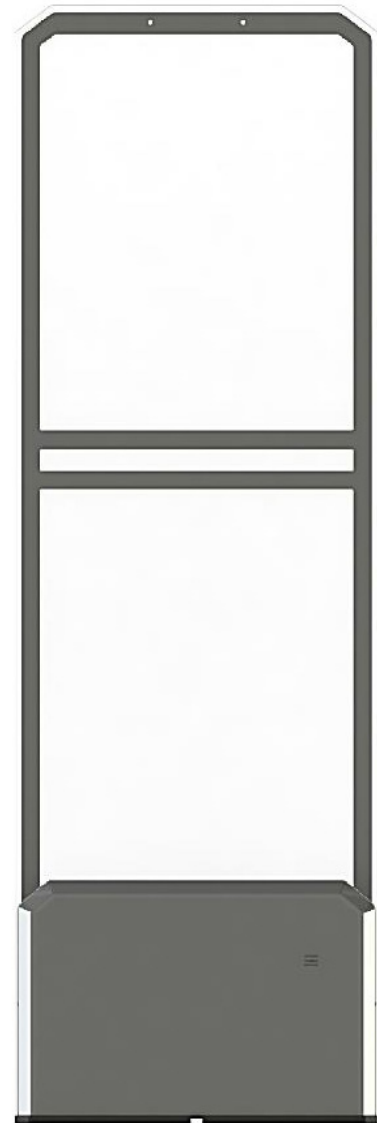

Centurion 6A

State-of-the-art AM system for 6 foot door openings

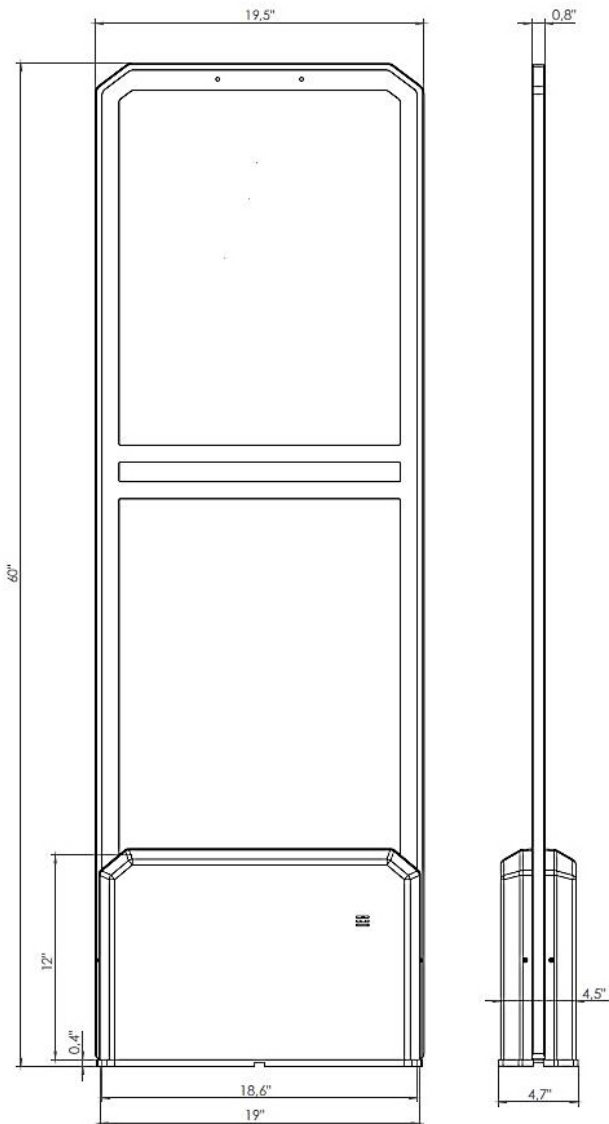

SPECIFICATIONS	
Height	60"
Width	19.5"
Depth	4.5" at the bottom, 0.8" at the top
Weight	40 lbs.
Detection range	6 feet per pedestal (3 feet per side)
Power requirement	0.5 A 100-120 VAC @ 60 Hz
Fuse rating	1 A @ 250 V
Power consumption	120 W
Operating frequency	58 KHz \pm 200 Hz
Transmit burst	1.6 mS
Burst repetition rate	90 Hz or 45 Hz (normal) on 60Hz AC line @ 58 KHz
Receiver center frequency	58 KHz
Alarm mode	Piezo / LED on RX antenna
Operating temperature	32° F - 122° F
Relative humidity range	0 - 90%, non-condensing
Materials composition	Plastic, acrylic, steel

ORDER CODES

ANT-CTR500 A3M UNI CDUS
(Antenna with an integrated control unit)

ANT-CTR500 AM UNI CDUS
(Antenna without a control unit)