

Centurion 9A

Advanced AM system for 9 foot door openings

With its clean lines and advanced electronics, Centurion 9A offers extended coverage of nine-foot door openings helping deter shrink without detracting from store decor.

Centurion 9A automatically detects interference and the use of EAS jammers. The optional people counter can provide useful store analytics, while the remote tuning capabilities help with reducing the total cost of ownership.


KEY FEATURES

- ▲ Modern and elegant acrylic design
- ▲ Exceptional detection rate
- ▲ Sensitivity adjustment reduces false alarms
- ▲ Built-in jammer detection
- ▲ Network connection and I/O port for easy integration with other LP systems
- ▲ Optional remote tuning capability can reduce maintenance costs and downtime
- ▲ Optional people counter can help with store operations and scheduling



Centurion 9A

Advanced AM system for 9 foot door openings

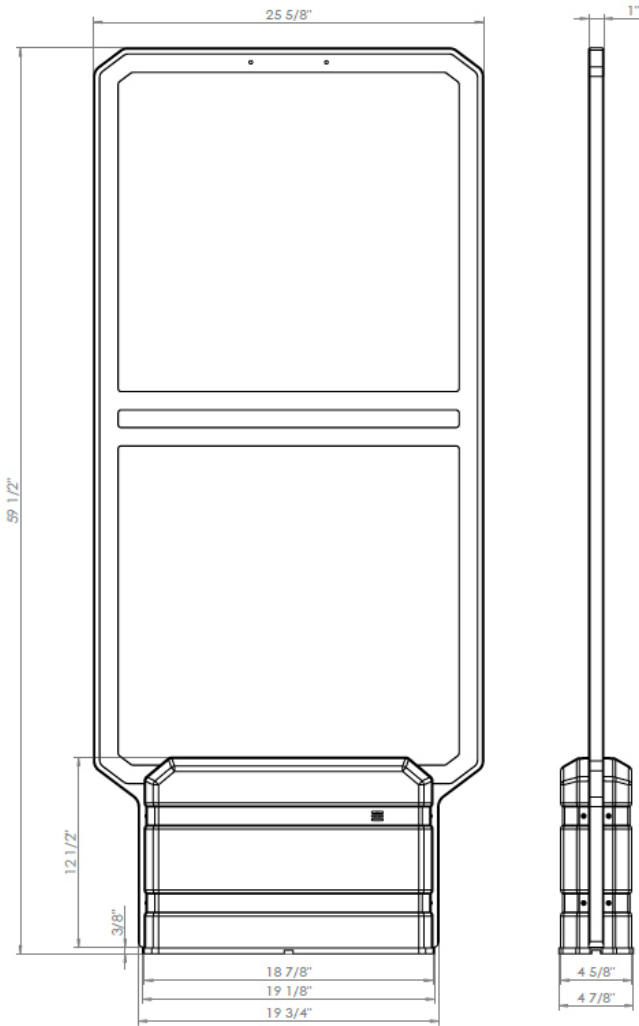

ORDER CODES

Antenna: ANT-CTR650 AM UNI CDUS

Control box: AM CONTROL BOX CDUS

SPECIFICATIONS

Height	59.5"
Width	25.625"
Depth	4.625" at the bottom, 1" at the top
Weight	70 lbs.
Detection range	9 feet per pedestal (4.5 feet per side)
Power requirement	0.5 A 100-120 VAC @ 60 Hz
Fuse rating	1 A @ 250 V
Power consumption	120 W
Operating frequency	58 KHz ±200 Hz
Transmit burst	1.6 mS
Burst repetition rate	90 Hz or 45 Hz (normal) on 60Hz AC line @ 58 KHz
Receiver center frequency	58 KHz
Alarm mode	Piezo / LED on RX antenna
Operating temperature	32° F - 122° F
Relative humidity range	0 - 90%, non-condensing
Materials composition	Plastic, acrylic, steel



PROSEGUR
SECURITY

(800) 405-1832 // PROSEGUR.US